

TRAMPOLINE ASSEMBLY INSTRUCTION – ALL SIZES

To assemble this trampoline all you need is our special spring loading tool provided with the product. During periods of non-use. This trampoline can be easily disassembled and stored. Please read the assembly instruction before beginning to assemble to product.

PROCESS OF ASSEMBLY


Please refer to page for part descriptions and numbers. The assembly steps use these descriptions and numbers as reference for your convenience. Make sure that you have all parts listed. If you are missing any parts, please refer to page 9 for instruction on how to attain any parts. To prevent any injuries to your hands from pinch points during assembly, please use gloves to protect your hands.

TRAMPOLINE PARTS LIST

Please select your trampoline size .

| N O | ITEM | PARTS | 8FT 1 | 8FT 2 | 10FT | 12FT | 14FT | 15 |
|----------------|-------------|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1 | A | Frame Cover | 1 | 1 | 1 | 1 | 1 | 1 |
| 2 | B | Jumping Mat | 1 | 1 | 1 | 1 | 1 | 1 |
| 3 | C | Top Rail I | 3 | 4 | 5 | 6 | 6 | 5 |
| 4 | D | Top Rail II | 3 | 4 | 5 | 6 | 6 | 5 |
| 5 | E | Springs | 54 | 56 | 60 | 72 | 96 | 100 |
| 6 | F | Leg Extention (left) | 0 | 0 | 5 | 6 | 6 | 5 |
| 7 | G | Leg Extention (right) | 0 | 0 | 5 | 6 | 6 | 5 |
| 8 | H | W-Shaped Leg | 3 | 4 | 5 | 6 | 6 | 5 |
| 9 | I | Screw | 6 | 8 | 20 | 24 | 24 | 20 |
| 10 | J | Tools | 1 set | 1 set | 1 set | 1 set | 1 set | 1 set |


**REMEMBER TO USE GLOVES DURING ASSEMBLY TO AVOID PINCHING
IT WILL REQUIRE AT LEAST TWO PEOPLE TO ASSEMBLE THE
TRAMPOLINE**

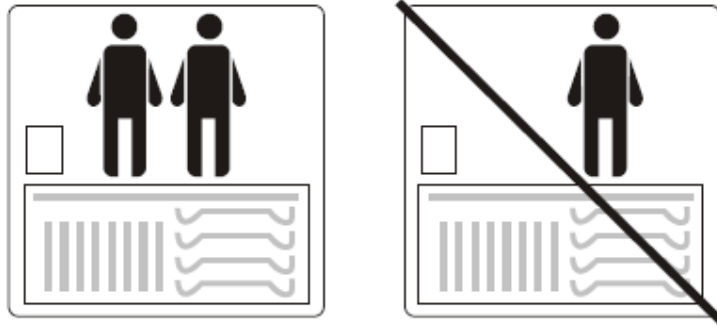

2 people must work together to move the heavy boxes and to fully assemble trampoline

TRAMPOLINE PARTS LIST


| PARTS | |
|-----------------------|---|
| Frame Cover | A |
| Jumping Mat | B |
| Top Rail I | C |
| Top Rail II | D |
| Springs | E |
| Leg Extension (left) | F |
| Leg Extension (right) | G |
| W-Shaped Leg | H |
| Screw | I |
| Tools | J |

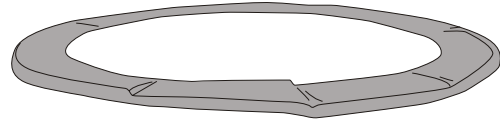


A Frame Cover




B Jumping Mat

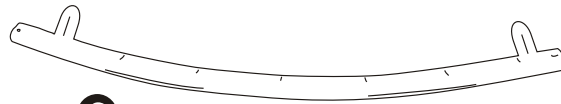

C Top Rail I




D Top Rail II




E Springs



I Small Screw

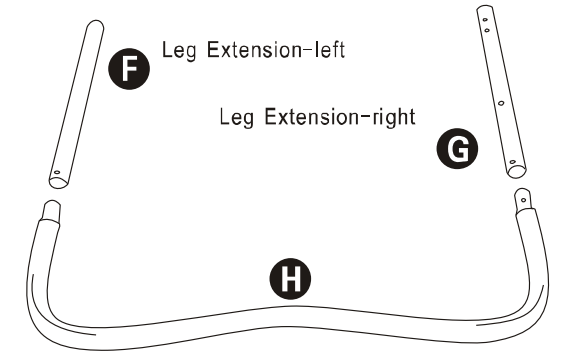

W-shaped Leg Piece

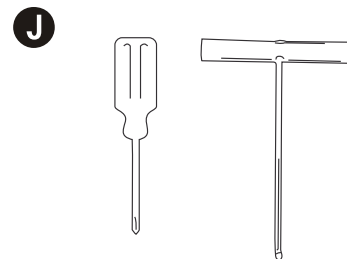

J Tools


ASSEMBLY

Refer to PARTS LIST for identification of parts

WARNING: At least two adults in good physical condition are required for the following assembly. Wear proper covered shoes. Failure to follow all instructions and warnings exactly may result in serious injury .



1

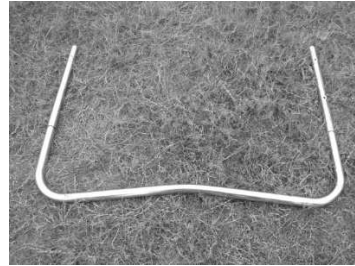

2

1. Lay out all trampoline parts in groups (just like picture) .
2. Begin by assembling one “w” shape leg. Attach leg Extension (R) to the right. Side and Leg Extension (L) to the left.



3



4



5

3. If you will attach the enclosure, remove the plastic plugs the upright tubes with a thin pair of pliers.
4. To assemble top rail, attach all the top rails together the top rail screws to fasten them together.
- 5 Continue until you form a large circle. Joining the last link may require at least two adults in good physical condition. With one person holding the opposite end, bring both sides of the circle firmly together.



6

6 Attach the “W” leg assembly to the top frame and secure with rail screws.



7

7 Attach the leg assemblies making sure the uprights alternate (F,G,F,G...).



8

8. Lay jumping mat inside frame and attach a spring into one of the triangle rings on the mat.



9

9. Attach spring with ring to frame. **WARNING:** Trampoline is under heavy tension, more effort may be required to attach spring to frame. Be careful not to pinch fingers or slip. Serious injury may occur!



10

10. Repeat this step directly across from where you attached first spring.



11

11. Attach two more spring half distance between the first two, directly across from each other.



12

12. Spring under heavy tension may require adjacent spring to be attached first.



13

13. Repeat the process of placing the spring half distance among the already placed springs. To even out tension, attach the opposite end of the previous spring.



14

14 Attach remaining spring until all springs are placed on frame.



15

15 Lay blue frame cover on outer edge so spring are covered – just like a shower cap.



16

16 Tie all black straps to top rail of frame. Do not tie to springs.



17

17. That's it! Your Trampoline is complete!

To disassemble repeat steps 1-17 in reverse.